



TruWood® SIDING

TRUWOOD OLD MILL® SHINGLE LAP SIDING


Architectural charm and the rich appearance of split shingle without the cost? It's Tru. With TruWood Old Mill® Shingle Lap Siding, you'll experience Tru quality, Tru style and Tru value. Less expensive and more durable than cedar, TruWood Old Mill Shingle Siding offers architectural accents without the typical number of culls or odd lengths. The staggered edge line of split shingle provides a warm, natural appearance that resists whatever Mother Nature throws at it. And with shiplap edges that are easier to install, even your labor costs are lower. Truly amazing.

FEATURES/BENEFITS

- Quality engineered surface and core
- 30-year limited warranty
- Pre-primed for improved weatherability
- 4 ft lengths
- Laser line on straight edge for ease in installation
- Staggered or straight edge options in one versatile piece
- Matching reversible TruWood Trim
- Use for residential single-family and multi-family housing, remodeling and light commercial projects
- Ask us about our FSC® products



- Endures extreme weather conditions in the toughest climates
- Resists mildew, rot and termite damage
- Naturally-occurring additive safe for use around children and pets

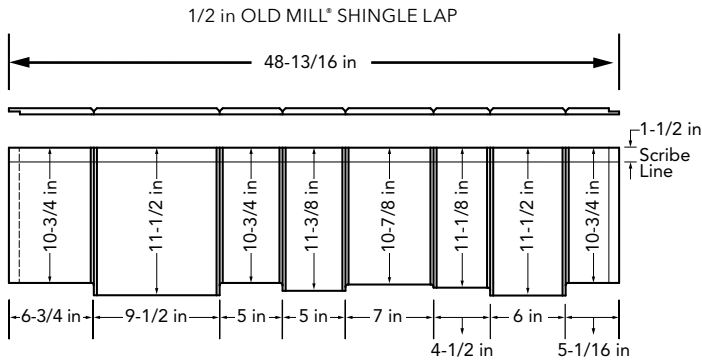

TruWood Old Mill® Shingle Lap Siding goes up fast and easy. It requires no special tools for installation and it comes in easy to haul four-foot lengths and a convenient shiplap edge.

SPECIFICATIONS:

Lap Size	Pc/ Unit	Sq. Ft./ Unit	Maximum Exposure in inches	Approx. Coverage Sq. Ft./ Unit	Sq. Ft. Needed To Cover 1,000 Sq. Ft. of Wall Area*	Approx. Weight Lbs./Unit
1/2 in x 11-1/2 in x 4 ft-13/16 in	140	537	9.75	455	1,240	985

*Allows for a 1.75 in overlap and assumes a 5% waste factor.

TruWood Siding and Trim meet the requirements of the following:

2015 International Building Code
 2015 International Residential Code
 ICC ESR-2588
 Federal Manufactured Housing Standards
 American National Standard ANSI-CPA 135.6 - 2015
 California Wildland-Urban Interface (WUI)

CAL. PROP 65 WARNING: Use of this product may result in exposure to wood dust, known to the State of California to cause cancer.

Fire rating = Class C, R Value = 0.67 (hour) (Sq. Ft.) (Fahrenheit) per BTU
 1/2 in Lap Siding = No Shear Value
 The approximate weight: 1/2 in Lap Siding = 1,826 Lbs./MSF

FOR YOUR NEAREST DISTRIBUTOR, COMPLETE INSTALLATION INSTRUCTIONS, MAINTENANCE, SERVICE AND WARRANTY INFORMATION, GO TO TruWoodSiding.com. FOR LOCATIONS, CALL **800.417.3674** OR EMAIL truwood@collinsco.com.

