



**TruWood**<sup>®</sup>  
 Collins Products LLC SIDING | TRIM

## TRUWOOD SELF-ALIGNING LAP SIDING

TruWood 1/2 in. Lap Siding's self-aligning feature creates Tru ease of installation, Tru time reduction and Tru labor savings. TruWood Siding combines a competitive price point and high quality to set a new industry standard for value. With expert craftsmanship and proven performance, TruWood Siding is the Tru choice for today's discerning builders.

### FEATURES/BENEFITS

- Quality engineered surface and core
- 30-year limited warranty
- Pre-primed for improved weatherability
- 16 ft. lengths
- Matching TruWood Trim
- Installs 25-40% faster than cement or vinyl sidings
- Use for residential single-family, multi-family housing, remodeling and light commercial projects
- Easy and safe to install using normal woodworking tools. No silica dust.
- Ask us about our FSC<sup>®</sup> products (FSC<sup>®</sup>-C002971)


TREATED WITH

**EcoGuard**<sup>®</sup>

ZINC BORATE

- Resists mildew, rot and termite damage
- Naturally-occurring additive safe for use around children and pets

**SELF-ALIGNING  
1/2 in. LAP SIDING**

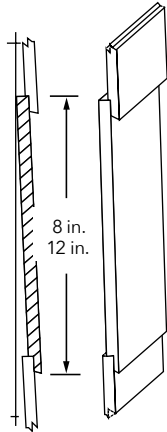

**SPECIFICATIONS:**

Lap Size	Pc./ Bundle	Pc./ Unit	Maximum Exposure in inches	Sq. Ft. Coverage Per Piece	Approx Coverage Sq. Ft./ Unit	Sq. Ft. Needed To Cover 1,000 Sq. Ft. of Wall Area	Approx. Weight Lbs./Unit
1/2 in. x 8 in. x 16 ft.	5	210	7	9.33	1862	1200	3945
1/2 in. x 12 in. x 16 ft.	5	140	11	14.67	1951	1145	4215

\*Allows for a 1 in. overlap and assumes a 5% waste factor.

**Selection**

Lap Size	Surface Texture
1/2 in. x 8 in. x 16 ft.	Old Mill <sup>®</sup>
1/2 in. x 12 in. x 16 ft.	Old Mill <sup>®</sup>

**TruWood Siding and Trim meet the requirements of the following:**

2021 International Building Code  
2021 International Residential Code  
ICC ESR-2588  
American National Standard ANSI-CPA 135.6 - 2012  
California Wildland-Urban Interface (WUI) Approved

Fire rating = Class C  
R Value = 0.67 (hour) (Sq. Ft.) (Fahrenheit) per BTU  
1/2 in. Lap Siding = No Shear Value

**CAL. PROP 65 WARNING:** Use of this product may result in exposure to wood dust, known to the State of California to cause cancer.

**PROPER STORAGE AND HANDLING**

- Store siding flat and support on stringers to avoid sagging and contact with the ground
- Siding must be covered and protected from the elements
- Stack no more than eight units high
- Allow siding to acclimatize to local conditions prior to installation

TO FIND YOUR NEAREST DISTRIBUTOR, WARRANTY INFORMATION, INSTALLATION INSTRUCTIONS, CARE AND MAINTENANCE INSTRUCTIONS, A SIDING CALCULATOR, OR TO VIEW OUR PRODUCTS ON SAMPLE HOMES USING OUR VISUALIZER TOOL, HEAD TO **TruWoodSiding.com**. CAN'T FIND WHAT YOU NEED? **800.417.3674**

