



**TruWood**<sup>®</sup>  
 Collins Products LLC SIDING | TRIM

## TRUWOOD PANEL SIDING

TruWood 7/16 in and 1/2 in Panel Sidings are engineered to provide Tru curb appeal. With a highly paintable, textured surface, TruWood Panel Siding provides the look of cedar without checks or cracks that can detract from the appearance of your project. TruWood Siding combines competitive prices and high quality to set a new industry standard for value. Expert craftsmanship and proven performance make TruWood Siding an excellent choice for today's quality and value conscious builders.

### FEATURES/BENEFITS

- Quality engineered surface and core
- 30-year limited warranty
- Pre-primed for improved weatherability
- Matching reversible TruWood Trim
- Installs 25-40% faster than cement or vinyl sidings
- Use for residential single-family, multi-family housing, remodeling and light commercial projects
- Easy and safe to install using normal woodworking tools. No silica dust.
- Ask us about our FSC<sup>®</sup> products


TREATED WITH

**EcoGuard**<sup>®</sup>


ZINC BORATE

- Resists mildew, rot and termite damage
- Naturally-occurring additive safe for use around children and pets


1/2 in OLD MILL® 808 STRIATED GROOVE  
7/16 in STURDY PANEL - 3/8 in GROOVE

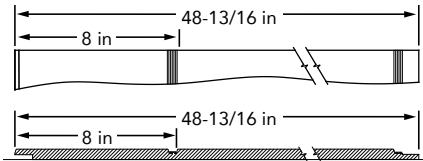


7/16 in OLD MILL® 8 in O.C. CHANNEL GROOVE -  
3/4 in GROOVE  
(also available in 4 ft x 7 ft and 4 ft x 9 ft panels)

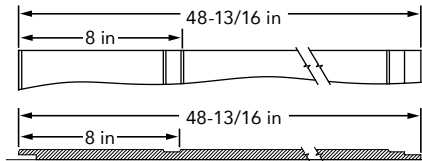

7/16 in OLD MILL® 12 in REVERSE BOARD AND BATTEN -  
1-3/16 in GROOVE

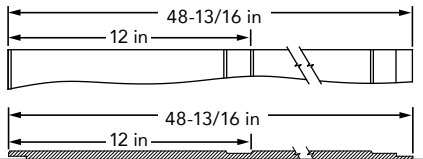

7/16 in OLD MILL® SQUARE EDGE  
7/16 in SMOOTH SQUARE EDGE

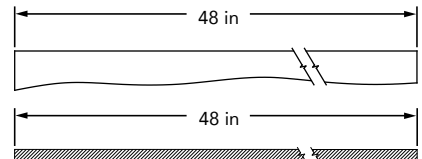

## SPECIFICATIONS:

Panel Size	Pc/ Unit	Sq. Ft. Coverage Per Piece	Approx Coverage Sq. Ft./ Unit	Sq. Ft. Needed To Cover 1,000 Sq Ft. of Wall Area	Approx. Weight Lbs./Unit
7/16 in x 48-13/16 in x 7 ft	45	28	1134	1100	2050
7/16 in x 48-13/16 in x 8 ft	45	32	1296	1100	2400
7/16 in x 48-13/16 in x 9 ft**	45	36	1458	1100	2650
1/2 in x 48-13/16 in x 8 ft	37	32	1066	1100	2400

\* Assumes 10% waste factor for cutting and fitting.  
All grooved panels are shiplapped on the long edges and cut oversize to provide 48 in net coverage when applied.

## Selection

Panel Style	Sizes	Surface Texture
Sturdy Panel 3/8 in Groove 8 in O.C.	7/16 in x 48-13/16 in x 8 ft	Old Mill®
3/4 Channel Groove 8 in O.C.	7/16 in x 48-13/16 in x 7 ft	Old Mill®
3/4 Channel Groove 8 in O.C.	7/16 in x 48-13/16 in x 8 ft	Old Mill®
3/4 Channel Groove 8 in O.C.	7/16 in x 48-13/16 in x 9 ft**	Old Mill®
Reverse Board & Batten 12 in O.C.	7/16 in x 48-13/16 in x 8 ft	Old Mill®
3/8 in Striated Groove 808 8 in O.C.	1/2 in x 48-13/16 in x 8 ft	Old Mill®
Square Edge (Plain)	7/16 in x 4 ft x 8 ft	Old Mill® & Smooth
Adobe™ Panel Siding Shiplap Edge	1/2 in x 48-13/16 in x 8 ft	Adobe™

\*\*Limited availability

## TruWood Siding and Trim meet the requirements of the following:

2018 International Building Code  
2018 International Residential Code  
ICC ESR-2588  
Federal Manufactured Housing Standards  
American National Standard ANSI-CPA 135.6 - 2012  
California Wildland-Urban Interface (WUI)

Fire rating = Class C  
R Value = 0.67 (hour) (Sq. Ft.) (Fahrenheit) per BTU  
Racking, when installed in accordance with TruWood application instructions:  
7/16 in Panel Siding = 155 Shear Value  
1/2 in Panel Siding = 202 Shear Value

**CAL. PROP 65 WARNING:** Use of this product may result in exposure to wood dust, known to the State of California to cause cancer.

TO FIND YOUR NEAREST DISTRIBUTOR, WARRANTY INFORMATION, INSTALLATION INSTRUCTIONS, CARE AND MAINTENANCE INSTRUCTIONS, A SIDING CALCULATOR, OR TO VIEW OUR PRODUCTS ON SAMPLE HOMES USING OUR VISUALIZER TOOL, HEAD TO **TruWoodSiding.com**. CAN'T FIND WHAT YOU NEED? **800.417.3674**

