



TRUWOOD TRIM

## TruWood<sup>®</sup> SIDING | TRIM

### TRUWOOD REVERSIBLE AND NON-REVERSIBLE TRIM

Durability? Style? Versatility? With TruWood Trim, you'll get all that and more. Attractive, reliable and easy to install, TruWood Trim is ideal for band boards, batten, corner boards, cornice, door trim, fascia, frieze boards, rake boards, soffits and window trim. It offers builders and architects an unbeatable combination of Tru beauty, Tru durability and Tru ease of use. Tru perfection.

#### FEATURES/BENEFITS

- Quality engineered surface and core
- 30-year limited warranty
- Pre-primed for improved weatherability
- 16 ft. lengths available in 2-1/2 in. to 11-1/4 in. widths (actual)
- 1 in. (actual) is reversible with Old Mill<sup>®</sup> texture on one side and smooth on the other. Primed all four sides.
- Use for residential single-family, multi-family housing, remodeling and light commercial projects
- Easy and safe to install using normal woodworking tools. No silica dust.
- Ask us about our FSC<sup>®</sup> products (FSC<sup>®</sup>-C002971)

TREATED WITH


**EcoGuard<sup>®</sup>**

ZINC BORATE



- Resists mildew, rot and termite damage
- Naturally-occurring additive safe for use around children and pets

New 2-1/2 in. width now available

## REVERSIBLE AND NON-REVERSIBLE TRIM

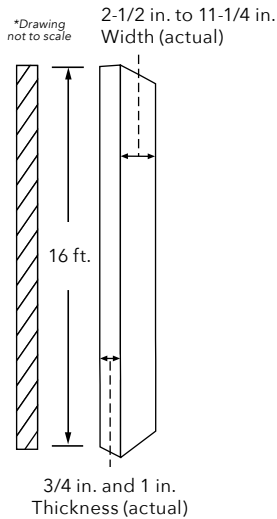

## PLOWED FASCIA

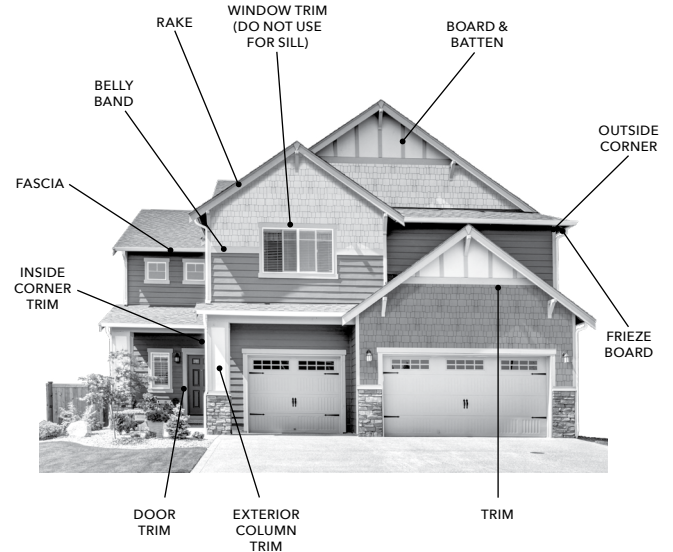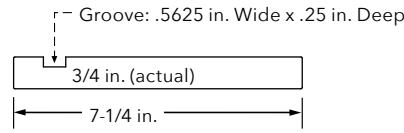

## SPECIFICATIONS:

Thickness	Pieces / Bundle	Pieces / Unit	Weight / Unit	Lineal Ft. / Unit	Actual	
<b>Non-Reversible</b>						
3/4 in. x 2-1/2 in. x 16 ft.	3/4 in.	12	360	3340	5760	0.75 in. x 2.5 in. x 16 ft.
3/4 in. x 3-1/2 in. x 16 ft.	3/4 in.	8	240	3060	3840	0.75 in. x 3.5 in. x 16 ft.
3/4 in. x 5-1/2 in. x 16 ft.	3/4 in.	8	160	3250	2560	0.75 in. x 5.5 in. x 16 ft.
3/4 in. x 7-1/4 in. x 16 ft.	3/4 in.	4	120	3330	1920	0.75 in. x 7.25 in. x 16 ft.
3/4 in. x 9-1/4 in. x 16 ft.	3/4 in.	4	100	3440	1600	0.75 in. x 9.25 in. x 16 ft.
3/4 in. x 11-1/4 in. x 16 ft.	3/4 in.	4	80	3310	1280	0.75 in. x 11.25 in. x 16 ft.
<b>Reversible</b>						
1 in. x 2-1/2 in. x 16 ft.	1 in.	9	324	3960	5184	0.960 in. x 2.5 in. x 16 ft.
1 in. x 3-1/2 in. x 16 ft.	1 in.	6	216	3820	3456	0.960 in. x 3.5 in. x 16 ft.
1 in. x 5-1/2 in. x 16 ft.	1 in.	6	144	3780	2304	0.960 in. x 4.5 in. x 16 ft.
1 in. x 7-1/4 in. x 16 ft.	1 in.	3	108	3940	1728	0.960 in. x 7.25 in. x 16 ft.
1 in. x 9-1/4 in. x 16 ft.	1 in.	3	90	4150	1440	0.960 in. x 9.25 in. x 16 ft.
1 in. x 11-1/4 in. x 16 ft.	1 in.	3	72	4030	1152	0.960 in. x 11.25 in. x 16 ft.
<b>Plowed Fascia</b>						
3/4 in. x 7-1/4 in. x 16 ft.**	3/4 in.	4	120	3200	1920	0.75 in. x 7.25 in. x 16 ft.

\*\*Old Mill® face, plowed on the Smooth Side.

## TruWood Siding and Trim meet the requirements of the following:

- 2024 International Building Code
- 2024 International Residential Code
- ICC ESR-2588
- ANSI A135.6-2012 (R2020)
- Wildland-Urban Interface (WUI) Approved\*

### \*WUI APPLICATION REQUIREMENTS

- Framing must not exceed 16 in. on center.
- Minimum 5/8 in. Type-X gypsum exterior sheathing is required.

Fire rating = Class C

R Value = 0.67 (hour) (Sq. Ft.) (Fahrenheit) per BTU

1/2 in. Panel Siding = No Shear Value

**CAL. PROP 65 WARNING:** Use of this product may result in exposure to wood dust, known to the State of California to cause cancer.

## PROPER STORAGE AND HANDLING

- Store siding flat and support on stringers to avoid sagging and contact with the ground
- Siding must be covered and protected from the elements
- Stack no more than eight units high
- Allow siding to acclimatize to local conditions prior to installation

TO FIND YOUR NEAREST DISTRIBUTOR, WARRANTY INFORMATION, INSTALLATION INSTRUCTIONS, CARE AND MAINTENANCE INSTRUCTIONS, A SIDING CALCULATOR, OR TO VIEW OUR PRODUCTS ON SAMPLE HOMES USING OUR VISUALIZER TOOL, HEAD TO [TruWoodSiding.com](https://www.TruWoodSiding.com). CAN'T FIND WHAT YOU NEED? **800.417.3674**

