



TruWood®

SIDING | TRIM

TRUWOOD ADOBE™ PANEL SIDING

Who says you can't have it all? TruWood Adobe™ 1/2 in. Panel Siding gives you Tru stucco texture, right down to the finisher's trowel marks. Engineered to be more damage-resistant than today's stucco, TruWood Adobe 1/2 in. Panel Siding offers easy installation with a shiplap edge and smooth, uniform paint application. All the benefits without the cost of masonry or the inconvenience of a lengthy curing time. The result: Tru Tudor elegance. Tru in architectural luxury. A Truly unforgettable first impression that lasts and lasts.

FEATURES/BENEFITS

- Quality engineered surface and core
- 30-year limited warranty
- Pre-primed for improved weatherability
- 4 ft. x 8 ft. panels for optimal versatility
- Matching TruWood Trim
- Installs 25-40% faster than cement or vinyl sidings
- Use for residential single-family, multi-family housing, remodeling and light commercial projects
- Easy and safe to install using normal woodworking tools. No silica dust.
- Available FSC®-certified


TREATED WITH

EcoGuard®

ZINC BORATE

- Resists mildew, rot and termite damage
- Naturally-occurring additive safe for use around children and pets

1/2 in. ADOBE™ PANEL SIDING SHIPLAP EDGE

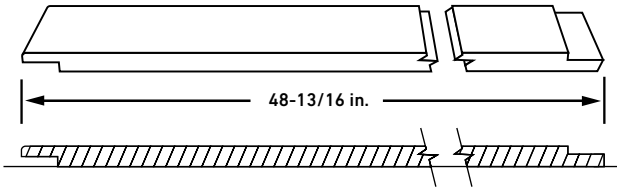

SPECIFICATIONS:

Panel Size	Pc./ Unit	Sq. Ft. Coverage Per Piece	Approx. Coverage Sq. Ft./ Unit	Approx. Sq. Ft. Needed To Cover 1,000 Sq. Ft. of Wall Area	Approx. Weight Lbs./Unit
1/2 in. x 48-13/16 in. x 8 ft.	37	32	1066	1100	2270

* Assumes 10% waste factor for cutting and fitting.
Adobe panels are shiplapped on the long edges and cut oversize to provide 48 in. net coverage when applied.

TruWood Siding and Trim meet the requirements of the following:

2024 International Building Code
2024 International Residential Code
ICC ESR-2588
ANSI A135.6-2012 (R2020)
Wildland-Urban Interface (WUI) Approved*

*WUI APPLICATION REQUIREMENTS

- Framing must not exceed 16 in. on center.
- Minimum 5/8 in. Type-X gypsum exterior sheathing is required.

Fire rating = Class C

R Value = 0.67 (hour) (Sq. Ft.) (Fahrenheit) per BTU

1/2 in. Panel Siding = No Shear Value

CAL. PROP 65 WARNING: Use of this product may result in exposure to wood dust, known to the State of California to cause cancer.

PROPER STORAGE AND HANDLING

- Store siding flat and support on stringers to avoid sagging and contact with the ground
- Siding must be covered and protected from the elements
- Stack no more than eight units high
- Allow siding to acclimatize to local conditions prior to installation

TO FIND YOUR NEAREST DISTRIBUTOR, WARRANTY INFORMATION, INSTALLATION INSTRUCTIONS, CARE AND MAINTENANCE INSTRUCTIONS, A SIDING CALCULATOR, OR TO VIEW OUR PRODUCTS ON SAMPLE HOMES USING OUR VISUALIZER TOOL, HEAD TO **TruWoodSiding.com**. CAN'T FIND WHAT YOU NEED? **800 417 3674**

